



DOWNTOWN TORONTO, CANADA

BRISK MFG INC.

1090 BREVIK PLACE, MISSISSAUGA, L4W 3Y5 ON CANADA
PHONE: 905-206-6888 EMAIL: INFO@BRISKMFG.COM



FOR ALL YOUR CLEAN AIR NEEDS.



BRISK MFG INC.

WWW.AIRMANAGEMENT.COM

TABLE OF CONTENTS

Fire Dampers

Static

BRISK-75A	1
BRISK-75B	2
75C, CR, CO	3

Thinline

BRISK-75DA	4
BRISK-75DB	5
C, CR, CO	6

Sleeve for Fire Dampers

75A, AF, B, B-1	7
Chute Dampers	8

Ceiling Radiation Dampers

Square and Rectangular	9
Round	

Fire and Smoke Dampers

Fire and Smoke Damper	10
Smoke Damper	11

Access Doors

Square and Rectangular Access Doors	12
Oval Access Doors	13
Doors for Round Duct	14
Access Doors with flanges	15

Control Damper

Control Damper	16
----------------------	----

Back Draft Damper

Back Draft Damper	17
-------------------------	----

FIRE DAMPERS



FIRE DAMPERS

BRISK-75A (HORIZONTAL AND VERTICAL)

STANDARD CONSTRUCTION

MAXIMUM SIZE

Single section, Vertical -60" x 60"

Horizontal-34"x60"

MINIMUM SIZE

4" x 4" - Vertical and Horizontal

FRAME

22 ga. Rollformed Steel frame

FINISH - Mill

TYPE

AV

AH

LISTED AND LABELLED BY:



BLADES

22 ga. Interlocking Steel Blades

'In Air Stream'

MULTIPLE SECTIONS ASSEMBLY

Vertical -120" x 120" -


Horizontal - 102 "x 60"

OPTIONS:



- ☐ Vertical Mount
- ☐ Horizontal Mount
- ☐ 165 deg. F. Fusible Link (Standard)
- ☐ 212 deg. F. Fusible Link
- ☐ 304 Stainless Steel Construction

Horizontal & Vertical

U.L. Classified
1-1/2 Hour Rating

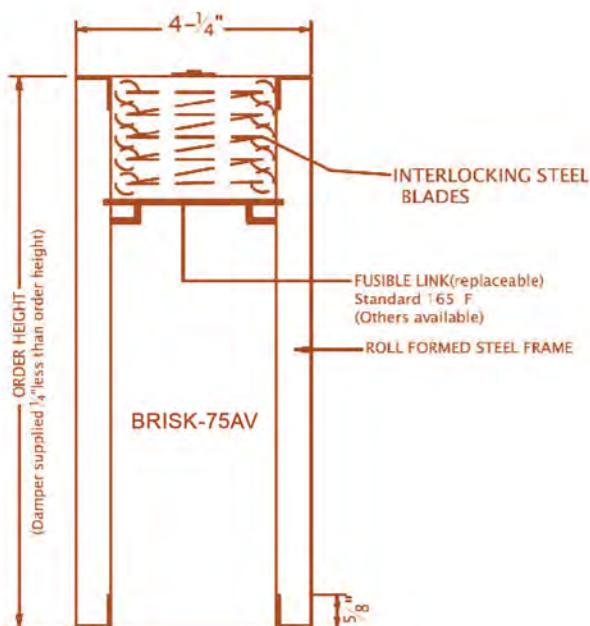

(V) VERTICAL MOUNT

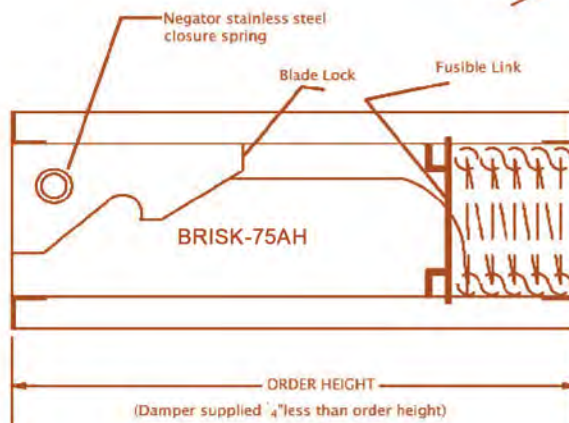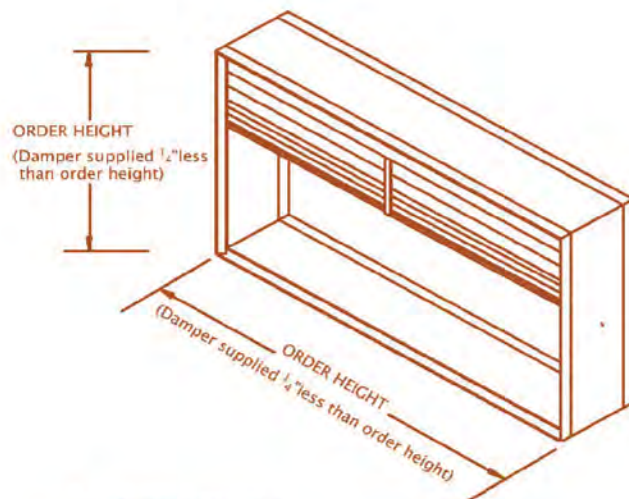

(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING MODEL INCLUDES STAINLESS STEEL NEGATOR SPRINGS AND BLADE LOCKS

FIRE DAMPERS

BRISK-75B (HORIZONTAL AND VERTICAL)

STANDARD CONSTRUCTION

MAXIMUM SIZE

Single section -60" x 53" - Vertical
and 34"x53" Horizontal

MINIMUM SIZE

4" x 3" - Vertical
4" x 3" - Horizontal

FINISH

Mill

Fusible Link.

165 deg. F Standard

Horizontal & Vertical

U.L Classified
1-1/2 Hour Rating

LISTED AND LABELLED BY:



TYPE

BV

BH

FRAME

22 ga. Rollformed Steel frame

MULTIPLE SECTIONS ASSEMBLY

120" X 113" Vertical



102" X 53" Horizontal

BLADES


22 ga. Interlocking Steel Blades
'Out of Air Stream'

OPTIONS:

- ☐ Vertical Mount
- ☐ Horizontal Mount
- ☐ 165 deg. F. Fusible Link
- ☐ 212 deg. F. Fusible Link
- ☐ 304 Stainless Steel Construction

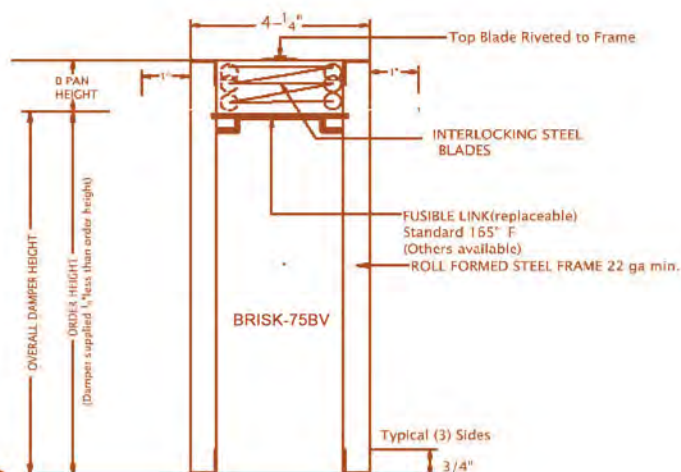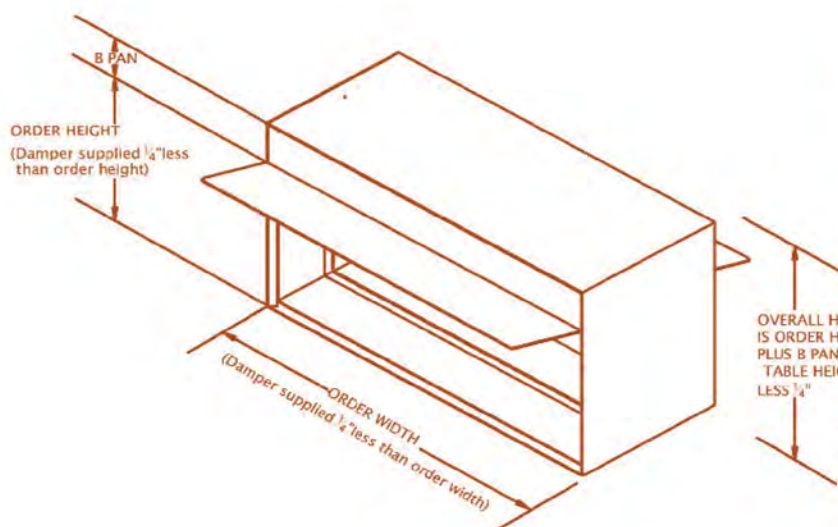

(V) VERTICAL MOUNT

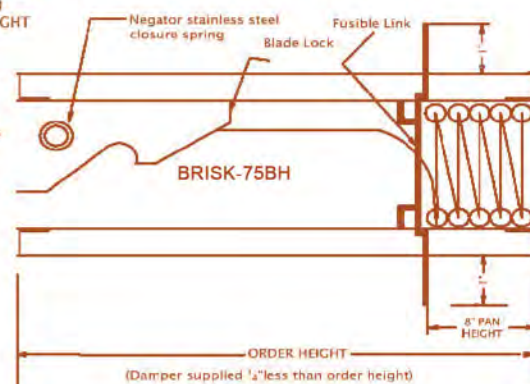

(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING MODEL INCLUDES STAINLESS STEEL NEGATOR SPRINGS AND BLADE LOCKS

FIRE DAMPERS

BRISK-75 (RECTANGULAR, ROUND AND OVAL)

STANDARD CONSTRUCTION

MAXIMUM SIZE

Vertical Single section -60" x 53" - and 52" Round
Horizontal -Single section -34"x53" and 32" Round

MINIMUM SIZE

4"- Round

FINISH

Mill

Fusible Link.

165 deg. F Standard

Horizontal & Vertical
U.L. Classified
1-1/2 Hour Rating

LISTED AND LABELLED BY:



FRAME

22 ga. Rollformed Steel frame

MULTIPLE SECTIONS ASSEMBLY

120" x 113" - Vertical
102" x 53"- Horizontal

BLADES


22 ga. Interlocking Steel Blades
'Out of the Air Stream'

TYPE

C
CR
CO


OPTIONS:

- | | |
|---|---|
| ☐ 'C' Rectangular | ☐ Vertical Mount |
| ☐ 'CR' Round | ☐ Horizontal Mount |
| ☐ 'CO' Oval | ☐ 304 Stainless Steel Construction |
| ☐ 165 deg. F. Fusible Link | ☐ 212 deg. F. Fusible Link |

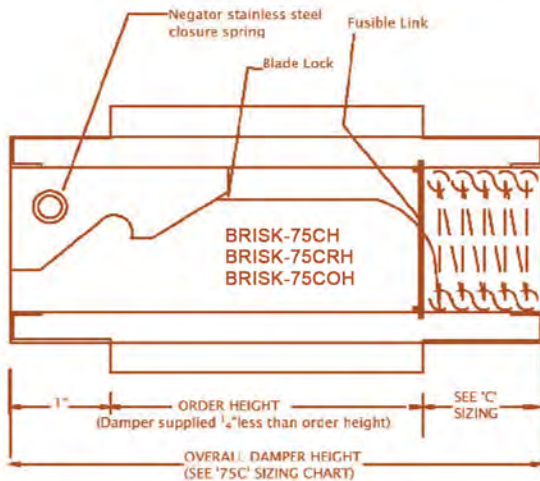

(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING MODEL INCLUDES STAINLESS STEEL NEGATOR SPRINGS AND BLADE LOCKS

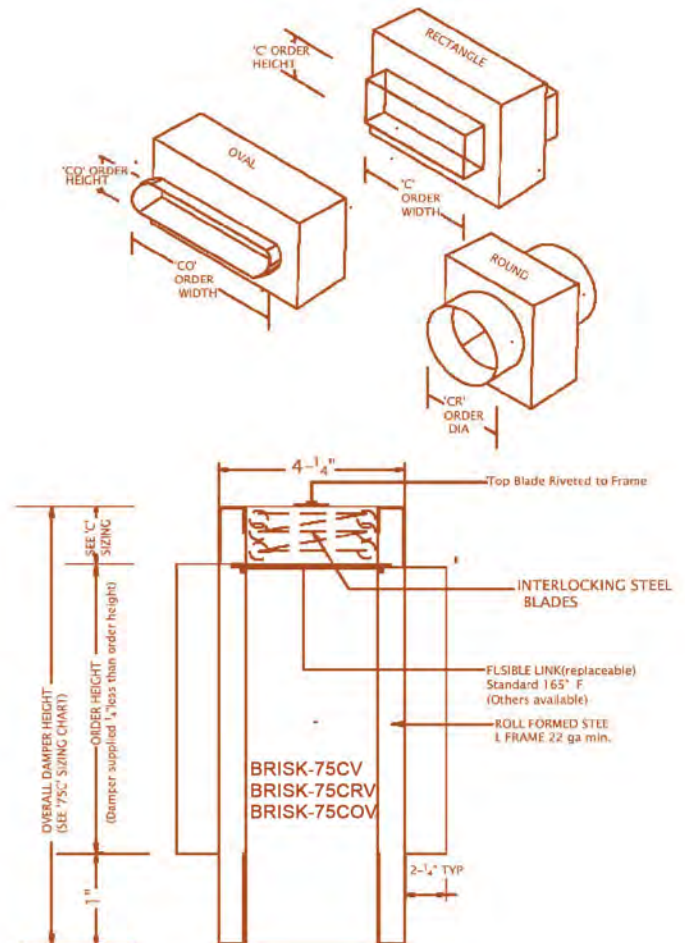

(V) VERTICAL MOUNT

FIRE DAMPERS

THINLINE BRISK-85DA

2" DEPTH FIRE DAMPER

STANDARD CONSTRUCTION

MAXIMUM SIZE

Single section - 41" x 36" or 36" x 60" Vertical
- 41" x 36" - Horizontal

MINIMUM SIZE

4" x 4" - Vertical and Horizontal

FINISH

Mill

Fusible Link.

165 deg. F Standard

FRAME

22 ga. Rollformed Steel frame

BLADES

22 ga. Interlocking Steel Blades
'In Air Stream'


OPTIONS:

- ☐ Vertical Mount
- ☐ Horizontal Mount
- ☐ 165 deg. F. Fusible Link
- ☐ 212 deg. F. Fusible Link
- ☐ 304 Stainless Steel Construction

**TYPE
DA**

**Horizontal & Vertical
U.L. Classified
1-1/2 Hour Rating**

LISTED AND LABELLED BY:

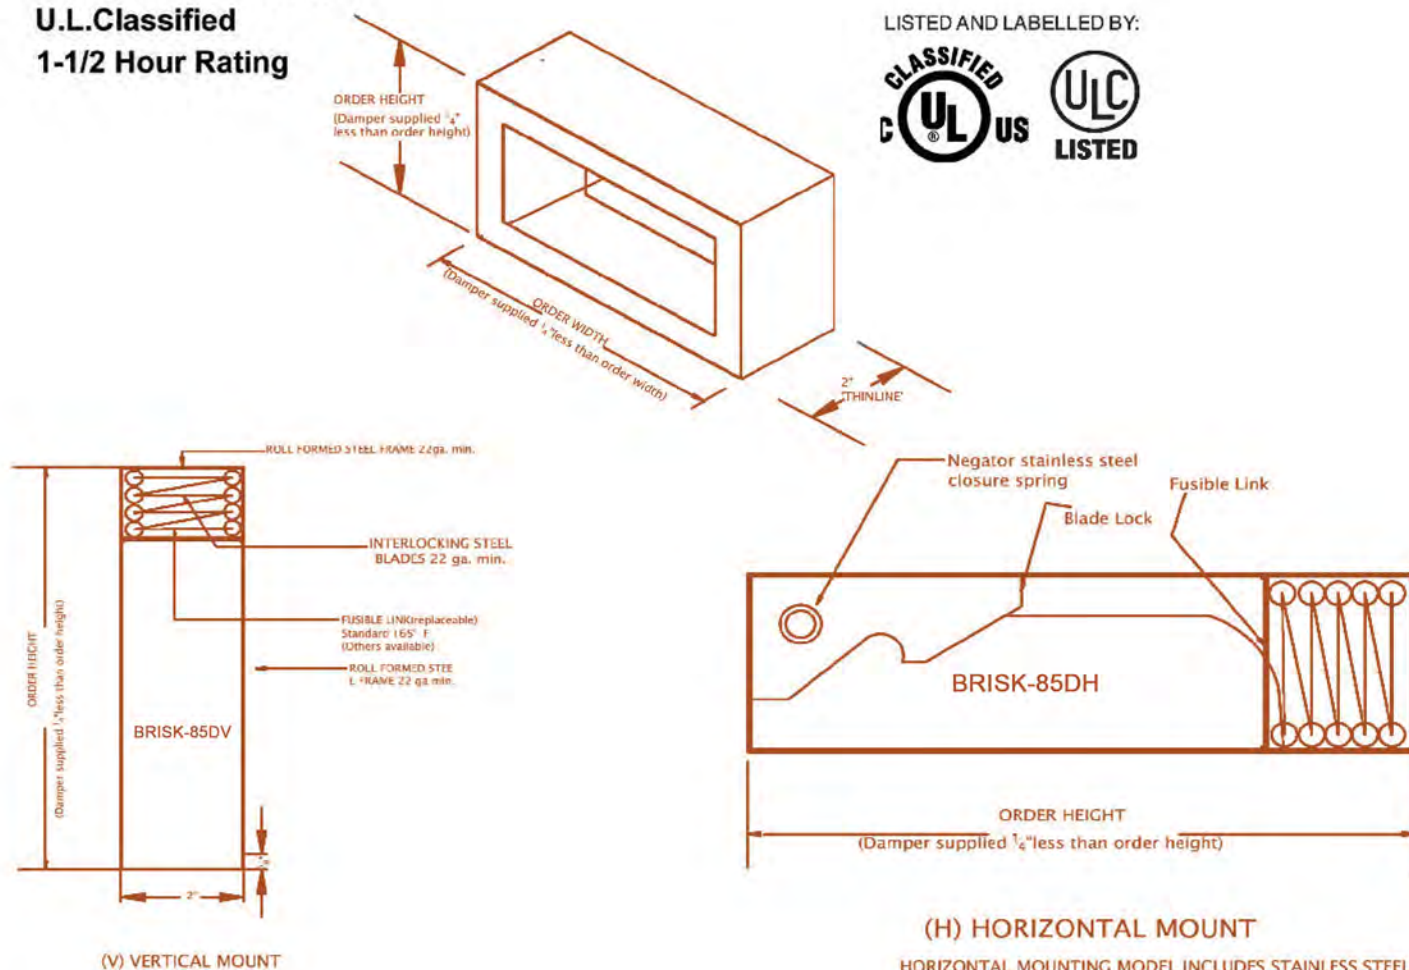

FIRE DAMPERS

THINLINE BRISK-85DA

2" DEPTH FIRE DAMPER STANDARD CONSTRUCTION

MAXIMUM SIZE

Single section - 41" x 30" or 36" x 50" Vertical
- 41" x 30" Horizontal

MINIMUM SIZE

4" x 3" - Vertical and Horizontal

FINISH

Mill


Fusible Link.

165 deg. F Standard

HORIZONTAL & VERTICAL


U.L. Classified

1-1/2 Hour Rating

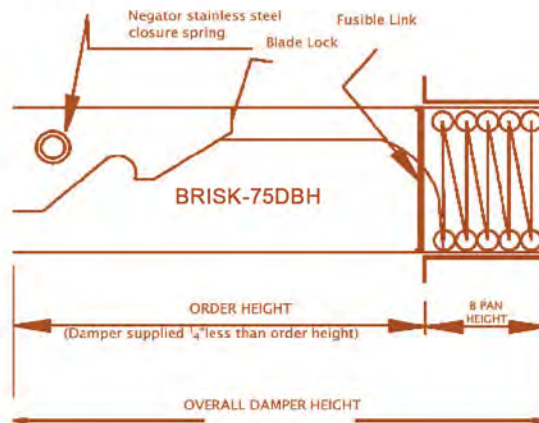

(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING MODEL INCLUDES STAINLESS STEEL NEGATOR SPRINGS AND BLADE LOCKS

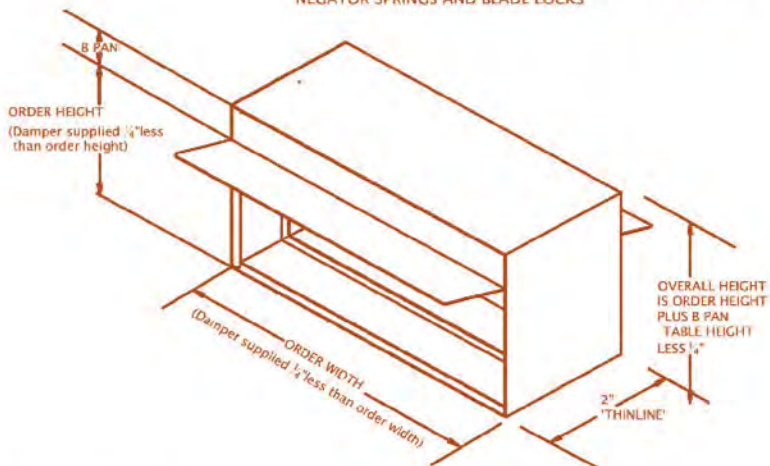

TYPE

DB

FRAME

22 ga. Rollformed Steel frame


BLADES

22 ga. Interlocking Steel Blades
'Out of the Air Stream'

OPTIONS:

- ☐ Vertical Mount
- ☐ Horizontal Mount
- ☐ 165 deg. F. Fusible Link
- ☐ 212 deg. F. Fusible Link
- ☐ 304 Stainless Steel Construction

LISTED AND LABELLED BY:

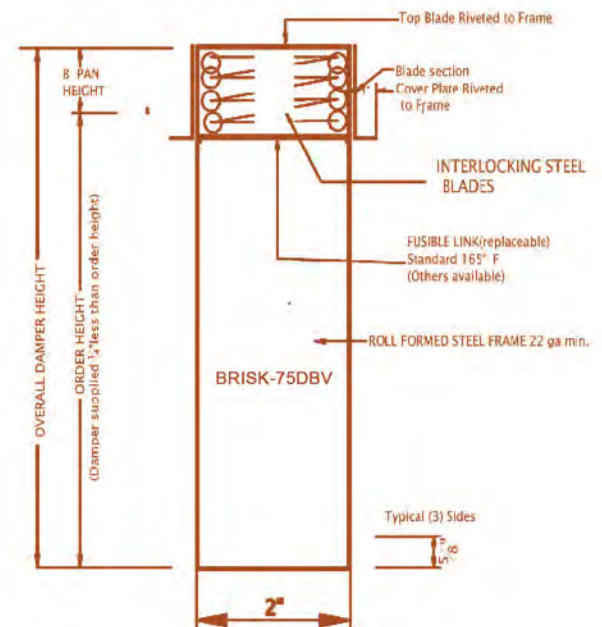

(V) VERTICAL MOUNT

FIRE DAMPERS

SLEEVE FOR FIRE DAMPERS C, CR, CO

TRANSITION COLLAR FOR FIRE DAMPER

SLEEVE DIMENSIONAL INFORMATION FOR CURTAIN FIRE DAMPERS AND DOORS

1. Dampers and sleeves are always priced and ordered by W x H or dimensions as shown.
The types B and B-1 both require the damper to be oversized. Actual overall dimensions can be determined by adding sleeve material thickness to the basic damper dimensions (after allowing for the standard 1/4" damper undersizing).

2. 'K' distance may be ordered at any dimension up to the sleeve length less onehalf the damper frame width. If 'k' dimension is not specified, 'k' dimension will be provided as sleeve length (L/2). (Damper On Centerline)

TYPE

C----- (75C RECTANGLE)

CR----- (75CR ROUND)


CO----- (75CO OVAL)

OPTIONS

- ☐ 1° SS - 304/316
- ☐ 2° FUSIBLE LINK 212° F
- ☐ 3° MOUNTING ANGLE 1 - 1/2 X 1 - 1/2


TYPE "CR" ROUND SLEEVE

When ordering specify: width x height x length x gauge + ('K' dimension). When not specified, dampers will be provided centered in sleeve length. (L/2)

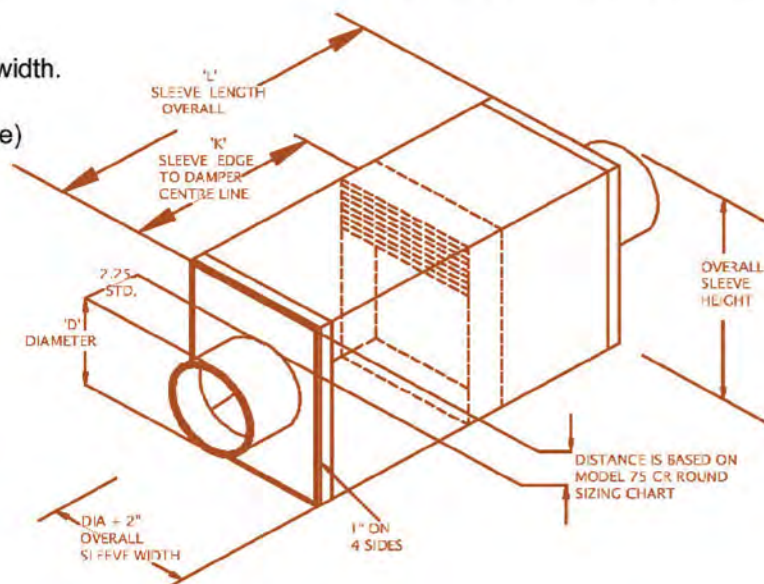


TYPE "C" RECTANGLE SLEEVE

When ordering specify: width x height x length x gauge + ('K' dimension). When not specified, dampers will be provided centered in sleeve length. (L/2)

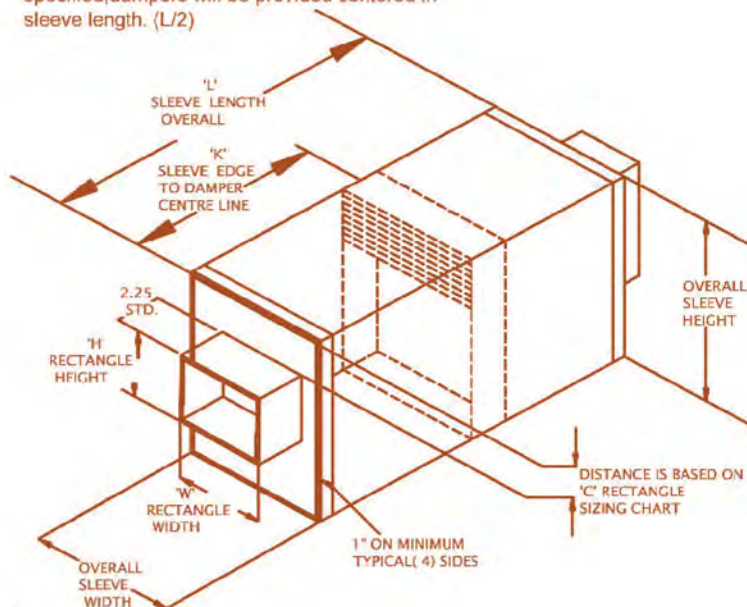

TYPE "CO" OVAL SLEEVE

When ordering specify: width x height x length x gauge + ('K' dimension). When not specified, dampers will be provided centered in sleeve length. (L/2)

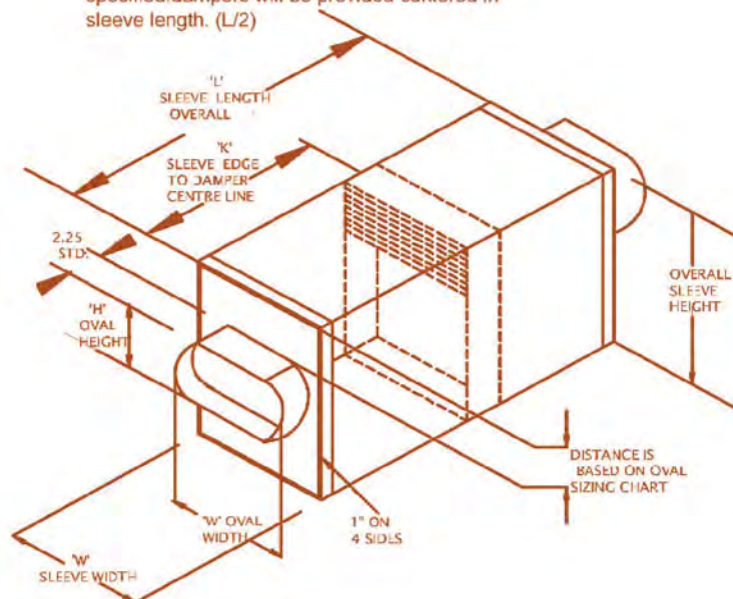

FIRE DAMPERS

SLEEVE FOR FIRE DAMPERS 75A, AF, B, B-1


TRANSITION COLLAR FOR FIRE DAMPER

SLEEVE DIMENSIONAL INFORMATION FOR CURTAIN FIRE DAMPERS AND DOORS

1. Dampers and sleeves are always priced and ordered by W x H or dimensions as shown.
The types B and B-1 both require the damper to be oversized. Actual overall dimensions can be determined by adding sleeve material thickness to the basic damper dimensions (after allowing for the standard 1/4" damper undersizing).
2. 'K' distance may be ordered at any dimension up to the sleeve length less onehalf the damper frame width.
If 'k' dimension is not specified, 'k' dimension will be provided as sleeve length (L/2). (Damper On Centerline)


TYPE "B" STANDARD 75B SLEEVE

When ordering specify: width x height x length x gauge +('K' dimension). When not specified, dampers will be provided centered in sleeve length. (L/2)

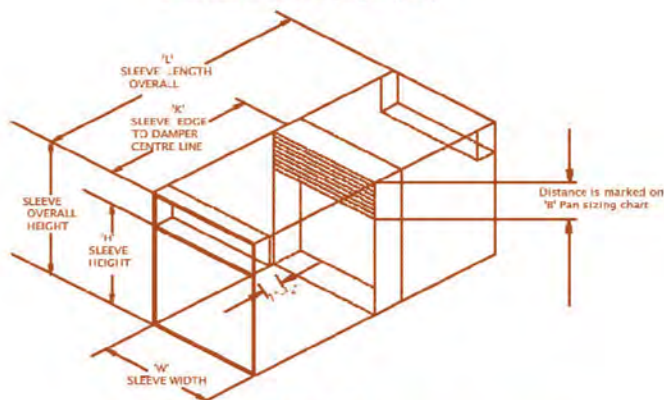

TYPE "B" STANDARD 75B SLEEVE

When ordering specify: width x height x length x gauge +('K' dimension). When not specified, dampers will be provided centered in sleeve length. (L/2)

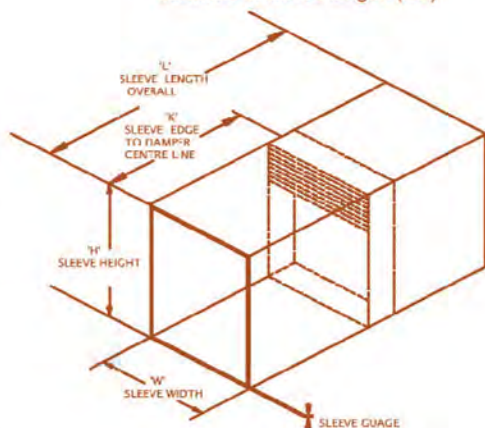

TYPE


- A----- (75A STANDARD)
AF----- (75 A FLANGED STANDARD)
B----- (75B STANDARD)
B-1----- (75 B MINIMUM DUCTING)

OPTIONS

- ☐ 1° SS - 304/316
☐ 2° FUSIBLE LINK 212° F
☐ 3° MOUNTING ANGLE 1 - 1/2 X 1 - 1/2


TYPE "AF" FLANGED 75A SLEEVE

When ordering specify: width x height x length x gauge +('K' dimension). When not specified, dampers will be provided centered in sleeve length. (L/2)

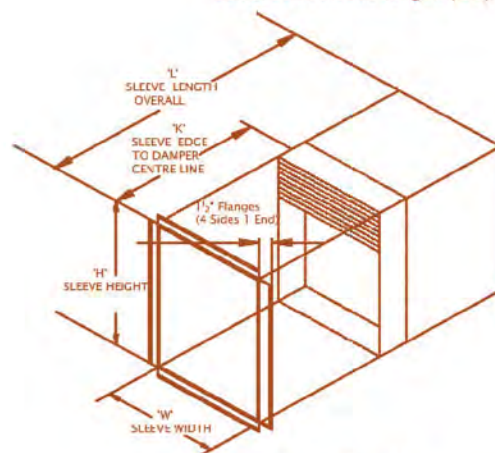

TYPE "B-1" STANDARD 75B SLEEVE

When ordering specify: width x height x length x gauge +('K' dimension). When not specified, dampers will be provided centered in sleeve length. (L/2)

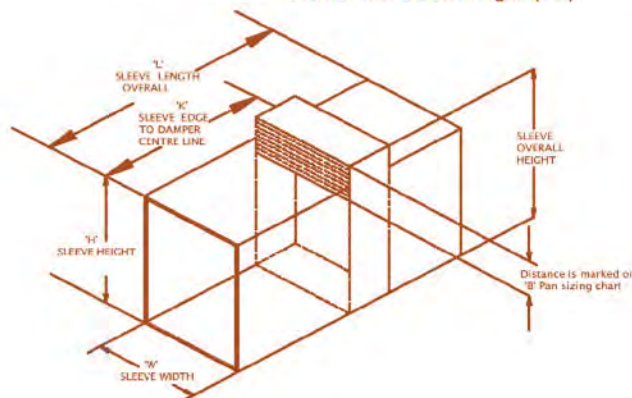

FIRE DAMPERS

CHUTE DAMPERS

STANDARD CONSTRUCTION

MAXIMUM SIZE

Single section -28" DIA

MINIMUM SIZE

18" DIA.

FINISH

Mill

Fusible Link.

165 deg. F Standard

U.L. Classified
1-1/2 Hour Rating

LISTED AND LABELLED BY:



TYPE CRHGC

FRAME

22 ga. Rollformed Steel frame

COLLAR

20 gauge

BLADES




22 ga. Interlocking Steel Blades
'Out of the Air Stream'

OPTIONS:

- ☐ 304 Stainless Steel Construction
- ☐ 212 deg. F. Fusible Link
- ☐ Without Collar
- ☐ With Collar


(H) HORIZONTAL MOUNT

Horizontal mounting model includes
stainless steel negator spring and
blade locks

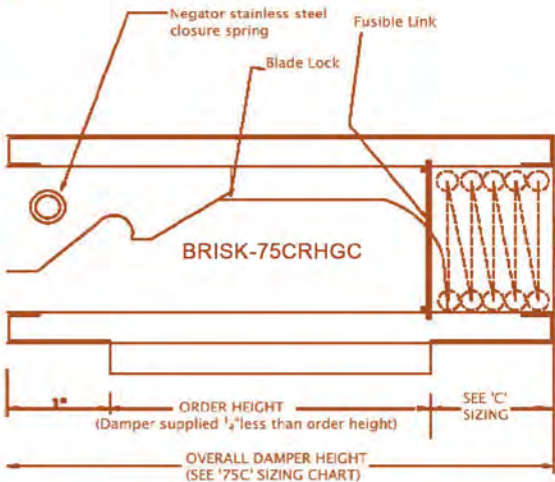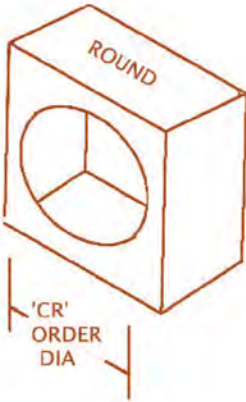

(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING MODEL INCLUDES STAINLESS STEEL
NEGATOR SPRINGS AND BLADE LOCKS

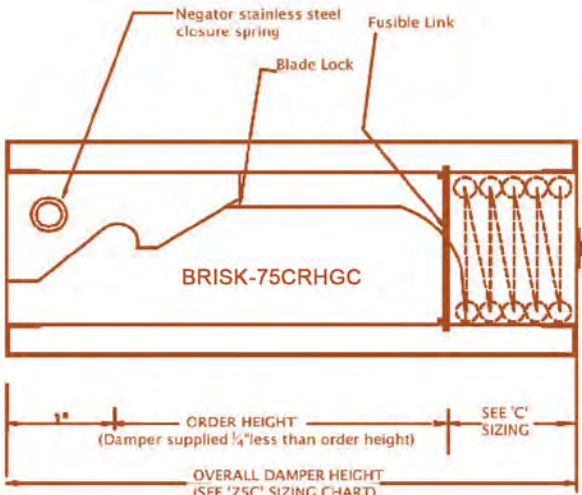

(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING MODEL INCLUDES STAINLESS STEEL
NEGATOR SPRINGS AND BLADE LOCKS

FIRE DAMPERS

CEILING RADIATION DAMPERS (RECTANGULAR AND ROUND)

STANDARD CONSTRUCTION

MAXIMUM SIZE

24" Diameter

MINIMUM SIZE

4" dia

FUSIBLE LINKS

165 deg, Standard

FINISH

Mill

FRAME

22 ga. Rollformed galvanized steel

BLADES

22 ga. Galvanized steel

U.L.Classified

1 1/2 Hour Rating

LISTED AND LABELLED BY:



TYPE 55 CRD


STANDARD CONSTRUCTION

MAXIMUM SIZE


24" x 24"

MINIMUM SIZE

4" x 4"

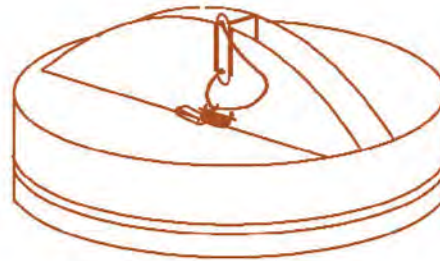

TYPE 50 CRD

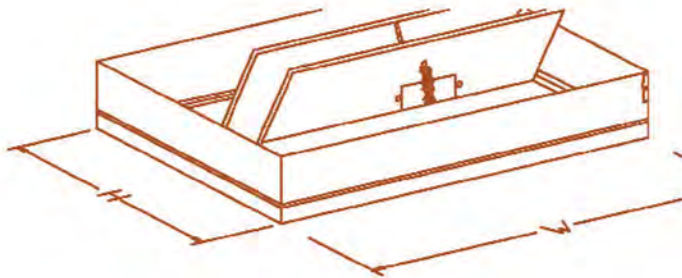**Note:**

1. Manufactured with Blade opening as per Sketch #1 when 'W' is equal to or greater than 6".
2. Manufactured with Blade opening as per Sketch #2 when 'W' is less than 6" or 'H' is greater than 'W' .
3. Ceramic Insulation is not UL required on Dampers with areas less than 80 sq. in. and is optional. Dampers above 80 sq. in. will be provided with Blade Insulation.

FIRE AND SMOKE DAMPERS

BRISK-V-FSS-100-1.5 AND BRISK-V-FSS-200-1.5

STANDARD CONSTRUCTION

MAXIMUM SIZE

Single section -36" X 48" - Vertical and Horizontal

MINIMUM SIZE

8" X6" - Vertical and Horizontal Class 1

6" X6" - Vertical and Horizontal Class 2

FRAME

20 GA. Galvanized Steel

Interlocking stacked hat section channel frame.

BLADES

16 ga. Galvanized triple 'V' formed

LINKAGE:

.12 x .50 zinc plated steel concealed in the channel frame.

FINISH:

Mill

AXLES:

Square zinc plated steel studs

BEARINGS

Sintered Bronze, Oil impregnated

BLADE SEALS

60-65 Durometer silicone rubber with laminated acrylic adhesive permanently bonded to blade edges.

JAMB SEALS

Corrosion resistant stainless steel

JACKSHAFT:

1/2" dia. Zinc plated steel with jackshaft connector coupling.

CAULKING:


UL Approved silicone sealants:

Dow Corning RTV-732, 999A, GE-1200.

OPTIONS:

- ☐ Vertical And Horizontal Mount
- ☐ Sleeves: Rectangle, Round, Oval & Specials
- ☐ Actuator: Electric
- ☐ Actuator Brand: Belimo 24V, 120V and 230V
- ☐ Actuator Mounting: External and Internal

TYPE
CLASS 1
CLASS 2

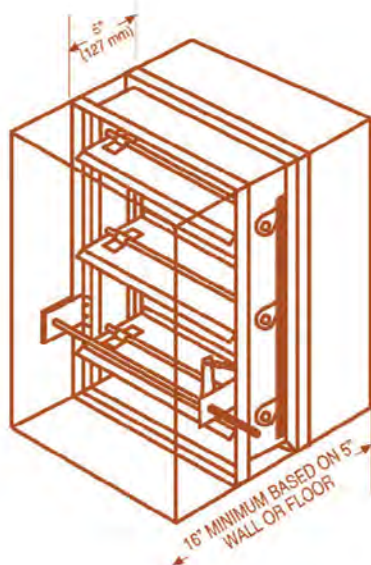

1-1/2 HR (FIRE DURATION RATING)
VERTICAL AND HORIZONTAL (INSTALLATION)
250 DEG. F (TEMPERATURE RATING)
PARALLEL BLADE (OPERATION)
TO 4.0" W.G. (MAXIMUM STATIC PRESSURE)
TO 2400 FPM (MAXIMUM VELOCITY)
POWER OPEN/SPRING CLOSURE

LISTED AND LABELLED BY:



SMOKE DAMPERS

BRISK-SD-V-100-1 AND BRISK-SD-V-200-2

STANDARD CONSTRUCTION

MAXIMUM SIZE

Single section -36" X 48" - Vertical and Horizontal

MINIMUM SIZE

8" X6" - Vertical and Horizontal

FRAME

20 GA. Galvanized Steel
Interlocking stacked hat section channel frame.

BLADES

16 ga. Galvanized triple 'V' formed

LINKAGE:

.12 x .50 zinc plated steel concealed in the channel frame.

FINISH:

Mill

AXLES:

Square zinc plated steel studs

BEARINGS

Sintered Bronze, Oil impregnated

BLADE SEALS

60-65 Durometer silicone rubber with laminated acrylic adhesive permanently bonded to blade edges.

JAMB SEALS

Corrosion resistant stainless steel

JACKSHAFT:

1/2" dia. Zinc plated steel with jackshaft connector coupling.


CAULKING:

UL Approved silicone sealants:
Dow Corning RTV-732, 999A, GE-1200.

OPTIONS:

- ☐ Vertical And Horizontal Mount
- ☐ Sleeves: Rectangle, Round, Oval & Specials
- ☐ Actuator: Electric
- ☐ Actuator Brand: Belimo 24V, 120V and 230V
- ☐ Actuator Mounting: External and Internal

TYPE
CLASS 1
CLASS 2

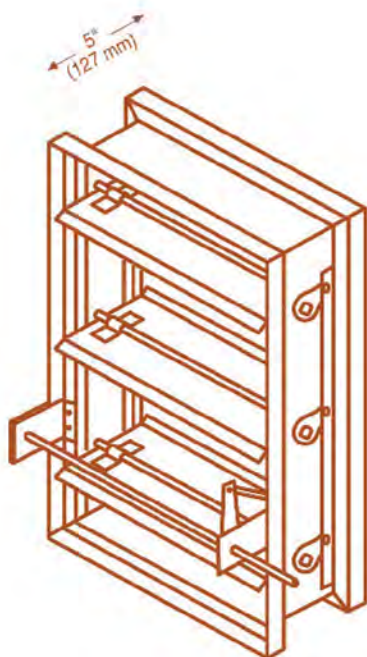


1-1/2 HR (FIRE DURATION RATING)
VERTICAL AND HORIZONTAL (INSTALLATION)
250 DEG. F (TEMPERATURE RATING)
PARALLEL BLADE (OPERATION)
TO 4.0" W.G. (MAXIMUM STATIC PRESSURE)
TO 2400 FPM (MAXIMUM VELOCITY)
POWER OPEN/SPRING CLOSURE

LISTED AND LABELLED BY:



ACCESS DOORS

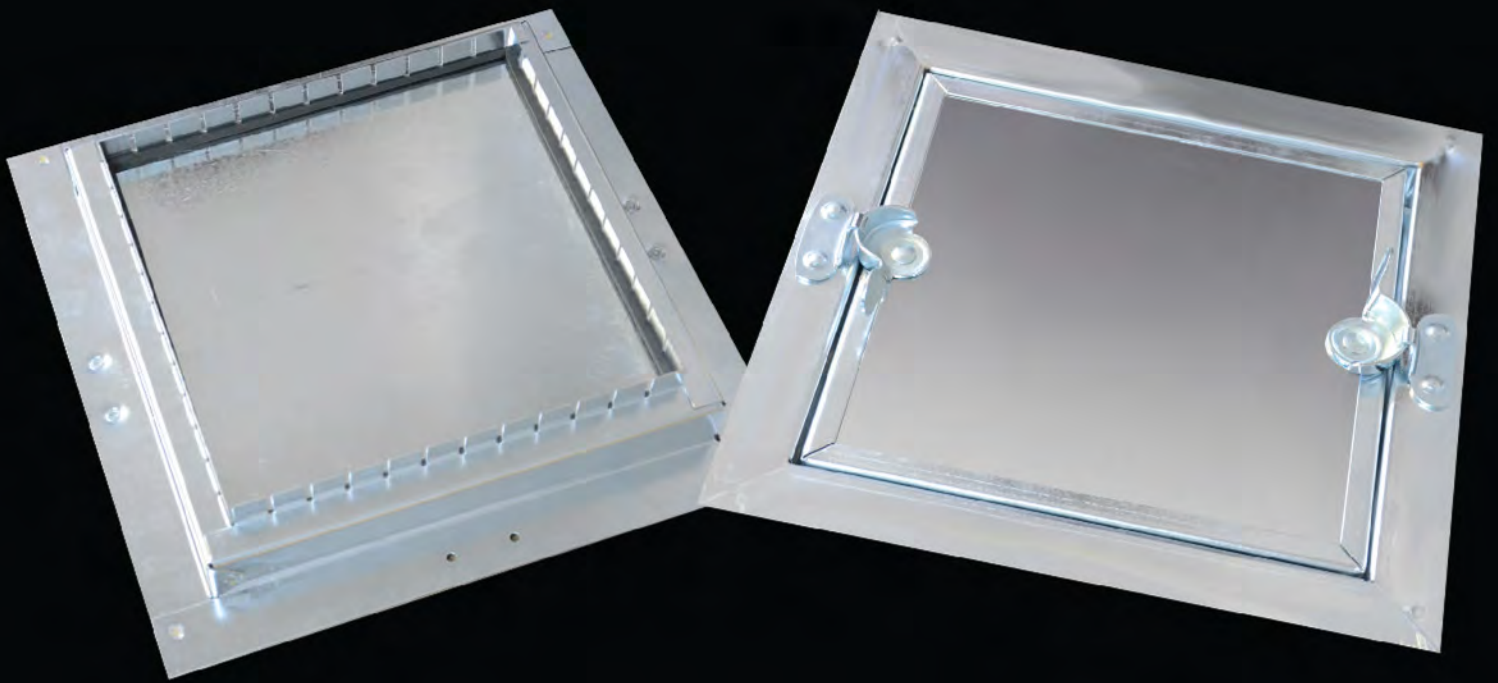

ACCESS DOORS

SQUARE AND RECTANGLE ACCESS DOORS

- 24 guage or 24 guage flanged frame and double panel galvanized steel door, guage depends on size.
- Notched knock - over
- High density, closed cell gasketing bonds, the door to the frame.
- Model ASR-C & ASR-H are complete with two (2) camlocks four (4) may be required on large size doors.
- Safety retaining chain is available as an option.
- Doors are complete with continous piano type hinge on one side and one (1) or two(2) camlocks on the opposite side for sizes upto 14".
- Over 14" same continous hinge on one side, and two (2) camlocks on the other.
- Meets SMACNA specifications
- Manufacture any size upto 44x44
- Door c/w 1" (25mm) or 2" (50mm) insulation
- Contact factory for pricing


TYPE
ASR-C
ASR-H

OPTIONS:

- ☐ Stainless steel 304
- ☐ Stainless steel 316

NOTE:

Camlock is available in galvanised steel finish only

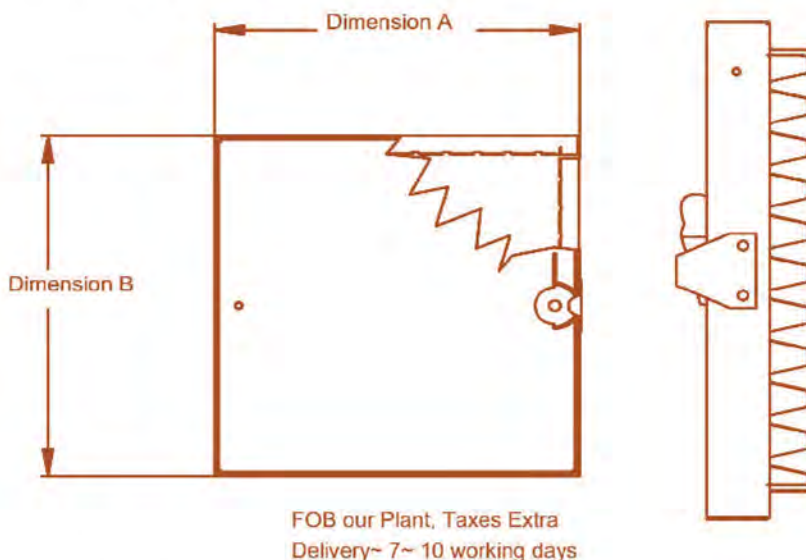

ACCESS DOORS

OVAL ACCESS DOORS

STANDARD CONSTRUCTION

Galvanized Steel

The door is two die-formed and seamless panels in a sandwich construction.
The frame is die-formed and seamless.

Features





Oval Shape for ease of installation.
Cut-out template provided.

Suitable for insulated or uninsulated duct.

TYPE ACC

Positive cam lock fastenings.
One piece extruded gasket for positive seal.
Thermal, Acoustic and Fire Retardant insulation.
Pre-punched holes in both flanges of frame.

Model	No. per Carton	Carton Size
ACC8x5	20	20"x16"x7.75"
ACC12x6	10	16.75"x14.5"x8.75"
ACC18x10	10	20.75"x16.75"x13"
ACC22x14	5	24.75"x16.5"x9.5"
ACC26x18	4	28.75"x20.5"x7.75"

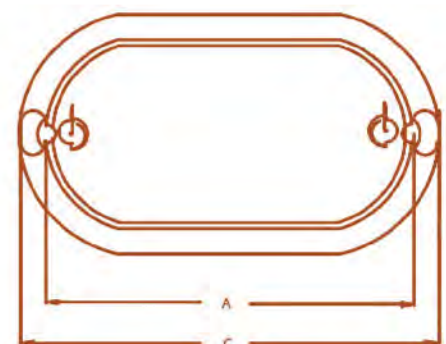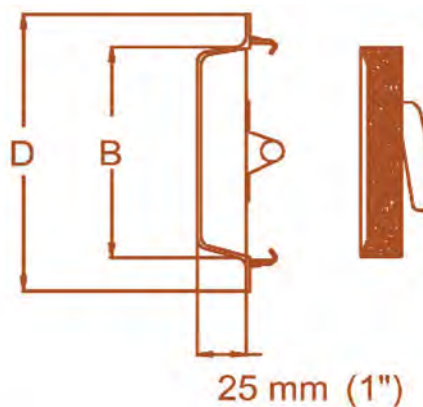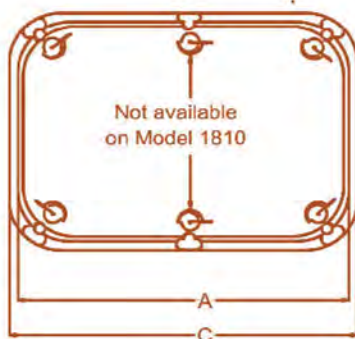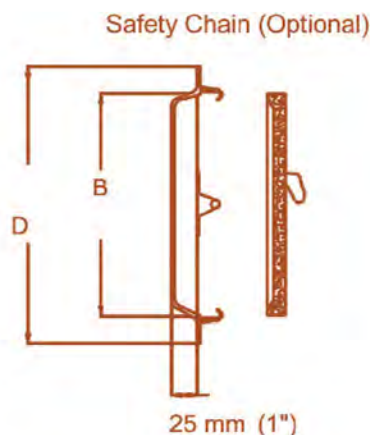

MODEL	O805		1206	
	NOM. SIZE	200X125 (mm)	8X5 (in)	300X150 mm
A	200	7 7/8	300	11 7/8
B	125	5	150	6
C	240	9 1/2	350	13 1/4
D	165	6 1/2	200	7 7/8

MODEL	1810		2214		2618	
	NOM. SIZE	460X250 (mm)	18X10 (in)	550X350 (mm)	22X14 (in)	650X450 (mm)
A	460	18 1/4	550	21 5/8	650	25 5/8
B	260	10 1/4	350	13 3/4	450	17 3/4
C	500	19 5/8	590	23 1/4	690	27 1/8
D	300	11 7/8	400	15 3/4	500	19 5/8

ACCESS DOORS

DOORS FOR ROUND DUCT



BRISK-ORS-Oval Sandwich Access Door Non- Insulated

BRISK-ORSI-Oval Sandwich Access Door Insulated

- Stamped from hot dipped G-60 galvanised steel
- Double skin (Inner and outer Door)
- Closed cell neoprene gasket
- Available, Insulated or Non insulated
- Insulated with polyester foam, permanently bonded to the outer door.
- Conical spring between inner and outer door for easier operation.
- Sizes available 4"x8", 8"x12", 12"x16", 18"x24"
- Template supplied

**TYPE
ORS
ORS-I**

- 4"x8" installed on round pipe from 5" to 14"
- 8"x12" installed on round pipe from 10" to 20"
- 12"x16" installed on round pipe from 14" to 36"
- 18"x24" installed on round pipe from 29" to 144"
- When ordering, specify the door size and pipe size. i.e.: 8"x12"-12" pipe.

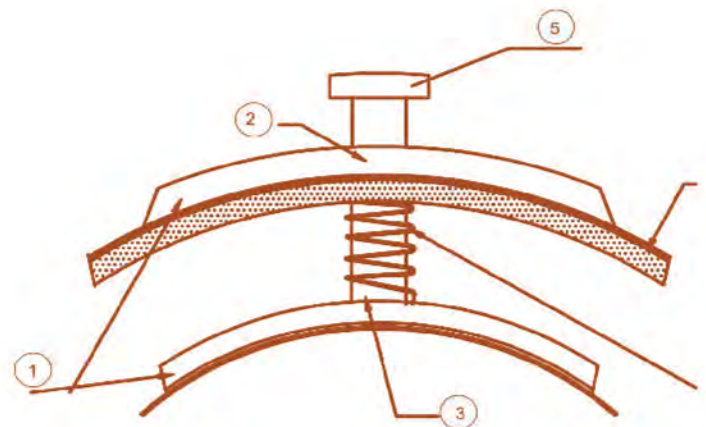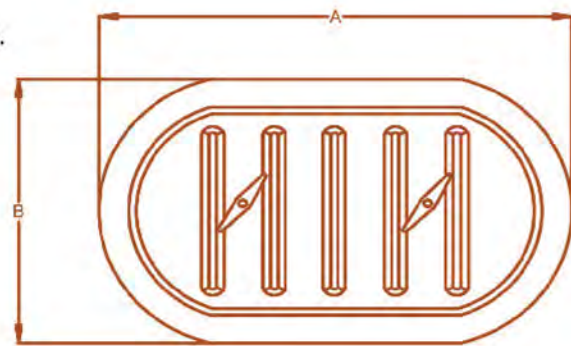

SPECIFICATIONS:

- 1- Formed 20 GA. Metal plates
- 2- Polyfoam insulation
- 3- Steel Bolt
- 4- Steel compression springs
- 5- Red polypropylene knobs with metal inserts
- 6- Closed cell neoprene gasket

Door Size AxB	Duct Size	Guage	No. per Carton
8"x4"	5"-6"	22 GA.	10 per Carton
	7"-9"		
	10"-11"		
	12"-14"		
12"x8"	10"-11"	22 GA.	10 per Carton
	12"-14"		
	15"-16"		
	17"-18"		
16"x12"	19"-20"	20 GA.	5 per Carton
	15"-16"		
	17"-18"		
	19"x20"		
	21"x22"		
	23"-24"		
	25"-28"		
24" x 18" available in 2 panels only	29"-32"	18 Ga. consult factory	2 per Carton
	33"-36"		
	37"-40"		
	41"-44"		
	45"-48"		
	49"-52"		
	53"-56"		
	57"-62"		
	63"-144"		

ACCESS DOORS

ACCESS DOORS WITH FLANGES

1" insulation c/w Flange & Double Cam Lock

2" insulation c/w Flange & Double Cam Lock

- 24 gauge flanged frame and double panel galvanized steel door, gauge depends on size.

- Notched knock - over

- High density, closed cell gasketing bonds, the door to the frame.

- Model PAA & PAB are complete with two (2) camlocks four (4) may be required on large size doors.

- Safety retaining chain is available as an option.

- Doors are complete with continuous piano type hinge on one side and one (1) or two(2) camlocks on the opposite side for sizes upto 14".

- Over 14" same continuous hinge on one side, and two (2) camlocks on the other.

- Meets SMACNA specifications

- Manufacture any size upto 44x44

- Door c/w 1" (25mm) or 2" (50mm) insulation

- Contact factory for pricing

TYPE

PAA

PAB


Dimension A	Dimension B
6x6	5x5
8x8	7x7
6x12	5x11
8x12	7x11
10x10	9x9
12x12	11x11
12x18	11x17
14x14	13x13
16x16	17x17
20x20	19x19
24x24	23x23

OPTIONS:

- Stainless steel 304
- Stainless steel 316
- 2" Insulation & double cam locks are also available

NOTE:

Camlock is available in galvanised steel finish only

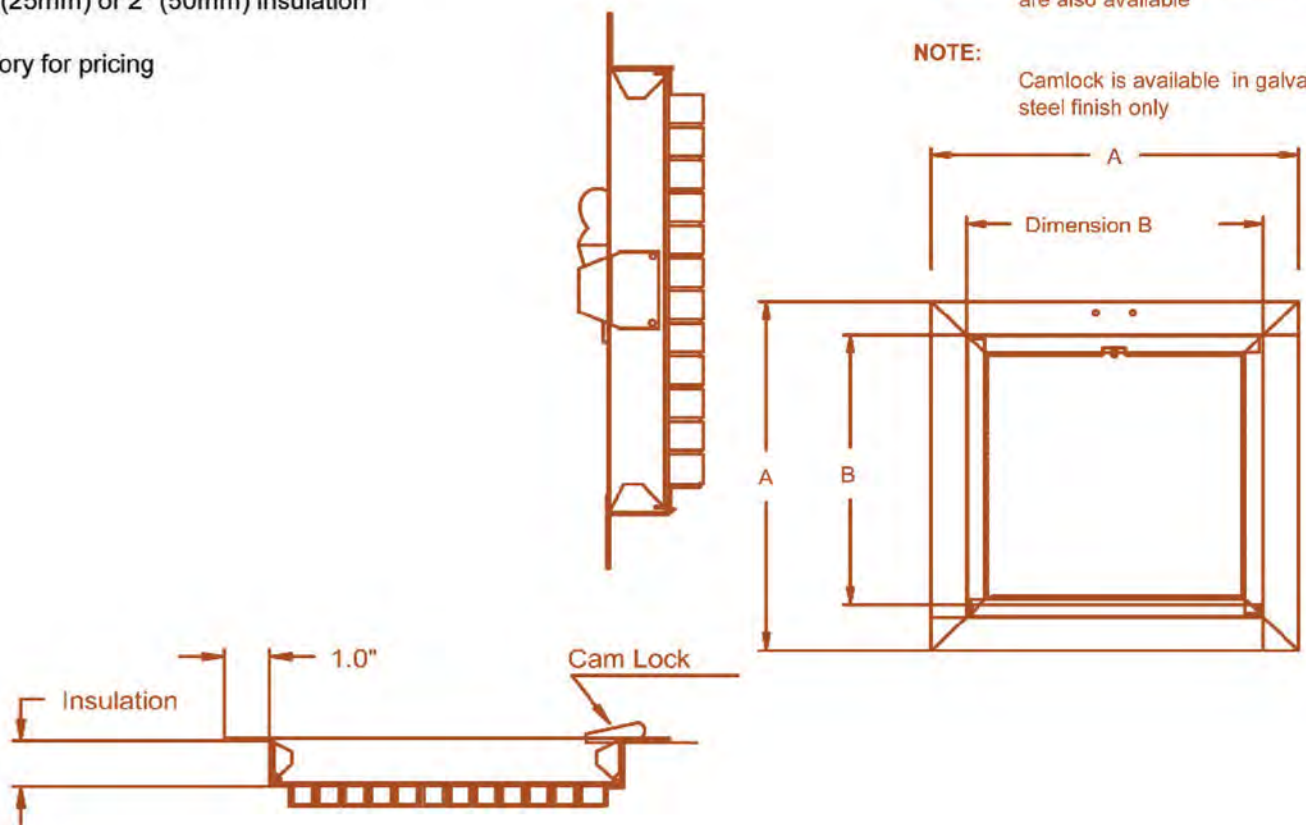

OVAL ACCESS DOORS



CONTROL DAMPERS

VOLUME CONTROL DAMPER

STANDARD CONSTRUCTION

MINIMUM SIZE

Single blade, 6" w x 6" h

Two blades - 6" w x 12" h concealed linkage

Two blades - 8" w x 14" h (203 x 356) exposed linkage

MAXIMUM SIZE

Single section - 60" w x 72" h (1219 x 1829)

Multiple sections - unlimited

AXLES

1/2" (13) Plated steel Square or Round

FINISH

Mill galvanized

BEARINGS

Bronze Oilite (others optional)

LINKAGE

Concealed in frame standard, exposed available

SEALS (CD 300S)

Stainless Steel jamb seals and Silicone blade edge

TEMPERATURE LIMITS

-40 degrees F (-40C) to +250 degrees F (+116C)

CONTROL SHAFT

6" (152) x 1/2" (13) dia. with expansion clip attachment. Outboard support bracket supplied with single section dampers for field mounted actuators. Factory installed jackshaft supplied with all multiple section dampers.

FRAME

Frame formed 5"x1" 16 Ga. galvanized steel hat channel style. Reinforced with corner bracing results in a structural strength equivalent to 13 Ga. Channel frames. Low profile 5" x 1/2", 16 ga. steel channel top and bottom frame used on dampers under 13" high.


BLADES

5"W and 6"W X 16 Ga. 3 v Bend and on approximately 6" centers. Parallel or Opposed action.


TYPE
CD-300
CD-300S

OPTIONS:

- ☐ Front Flange
- ☐ Rear Flange
- ☐ Double Flange
- ☐ Parallel Blades
- ☐ Opposed blades
- ☐ Concealed Linkage
- ☐ Exposed Linkage
- ☐ Stainless Steel
- ☐ Sleeve Bearings
- ☐ Actuators (24V, 120V, 230V)

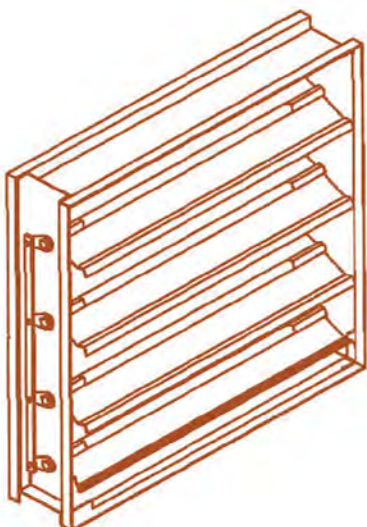

PARALLEL BLADES

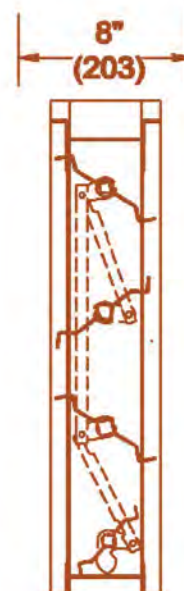

OPPOSED BLADES

BACKDRAFT DAMPERS

ALUMINUM PRESSURE RELIEF DAMPERS

STANDARD CONSTRUCTION

MINIMUM DAMPER SIZE

Single Blade :6" width (152.4) x 6" H(152.4)

MAXIMUM DAMPER SIZE

Single Blade :36" width (914.4) x 52" H(1320.8)

All dampers are fabricated 1/4" (6.4) under listed size unless specified "actual or exact. Dampers must be installed square and free from racking

BEARINGS

Nylon press fit into frame

LINKAGE BRACKET:

Aluminum 0.90

LINKAGE :

Stainless steel 304

FRAME

0.09" Aluminum 5052

BLADES

0.06 formed Aluminum 5052 with weatherstrip seal. Width between 3.5"(90) and 6" (152.4) depending on damper size.

FINISH

Mill Finish



AXLES

1/4" (6.4) diameter Aluminum 5052

TYPE BRISK-BDD

OPTIONS:

- ☐ Counter Balance
- ☐ Flange frame (front or rear)
- ☐ Electric motor operators
- ☐ Chain operator
- ☐ Horizontal mount
- ☐ Special finishes

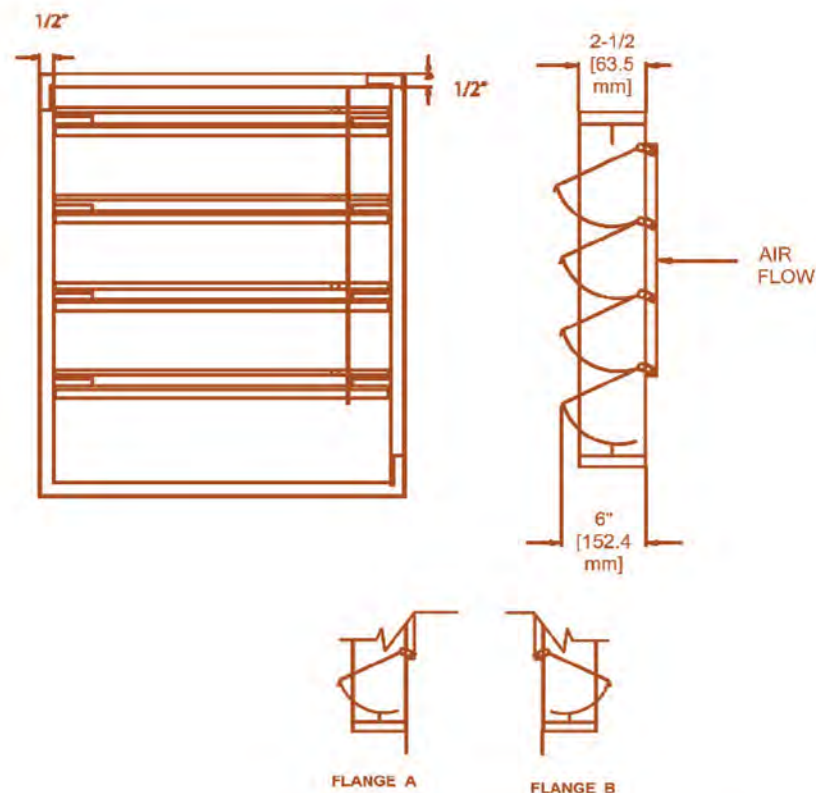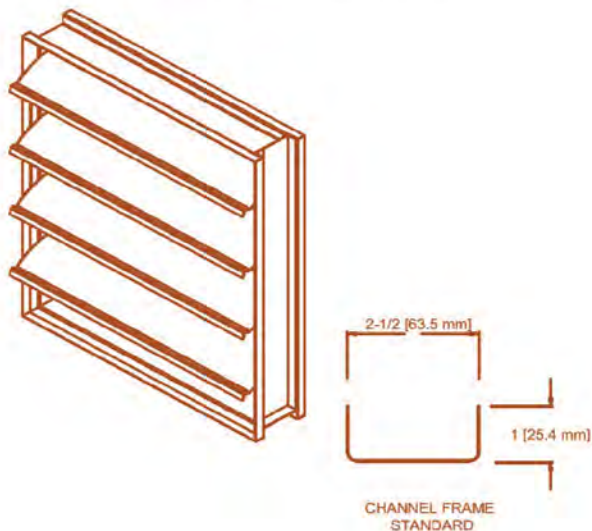

Flange frame (front or rear) option

BRISK



BRISK MFG INC.

1090 Brevik Place, Mississauga, L4W 3Y5 ON Canada

Phone: 905-206-6888

Email: info@briskmfg.com