


STATIC CURTAIN TYPE FIRE DAMPER - THINLINE

MODEL: AMI-85DB

APPLICATION

The model **AMI-85DB** is a Thinline damper with blades out of the air stream and has been UL tested and labeled for use in walls, floors, and partitions with fire resistance ratings less than 2 hours. The model carries a **1-1/2 hour** UL fire damper label.

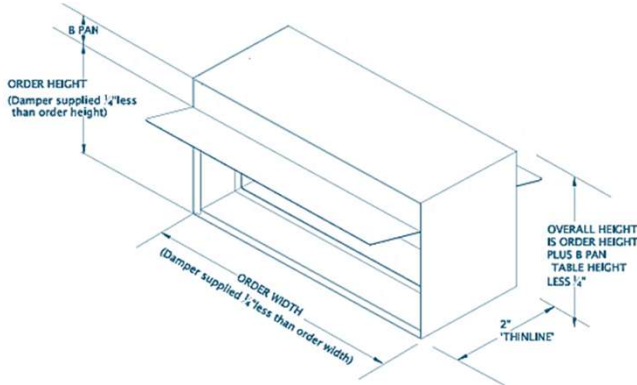

RATING



Underwriter Laboratories (UL555)
Classified Fire Dampers
Fire resistance rated 1.5 Hours
For use in UL Classified building
materials rated 2 Hours or less

CAN/ULC-S112

UL CLASSIFIED: 1 1/2 Hrs

STANDARD CONSTRUCTION

1. UL listed link (165°F)
2. Blades 22 ga. Interlocking steel blades
"Out of Air stream"
3. Roll-formed Steel Frame 22 ga.
4. Mill finish
5. Closure Spring - Negator Stainless Steel

OPTIONS

- ☐ Vertical mount
- ☐ Horizontal mount
- ☐ 212 deg F Fusible link
- ☐ 304 Stainless Steel construction
- ☐ 316 Stainless Steel construction

DAMPER SIZES


Minimum size:

Vertical & Horizontal: 4"x4" (100mm x 100mm)

Maximum size:


Vertical: 48"x49" (1219.2mm x 1244.6mm)

Horizontal: 41" x 36" (1041.4mm x 914.4mm)

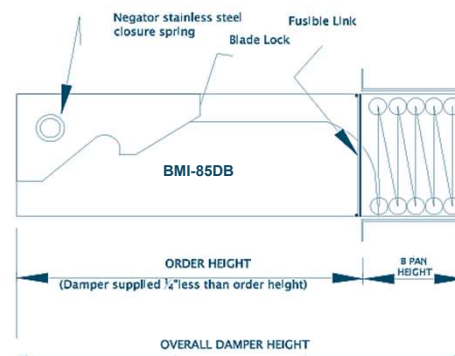

(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING MODEL INCLUDES STAINLESS STEEL
NEGATOR SPRINGS AND BLADE LOCKS

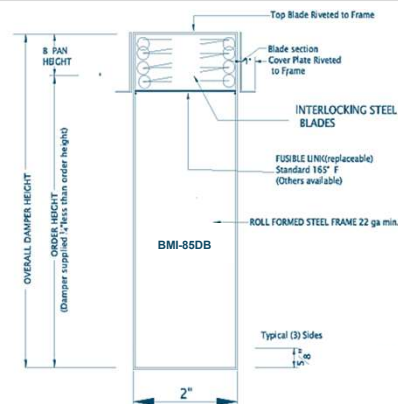

(V) VERTICAL MOUNT